


Premises Distribution Feeder and Distribution Ducts and Trays Last Mile LAN & FTTX

DISTRIBUTION OFC

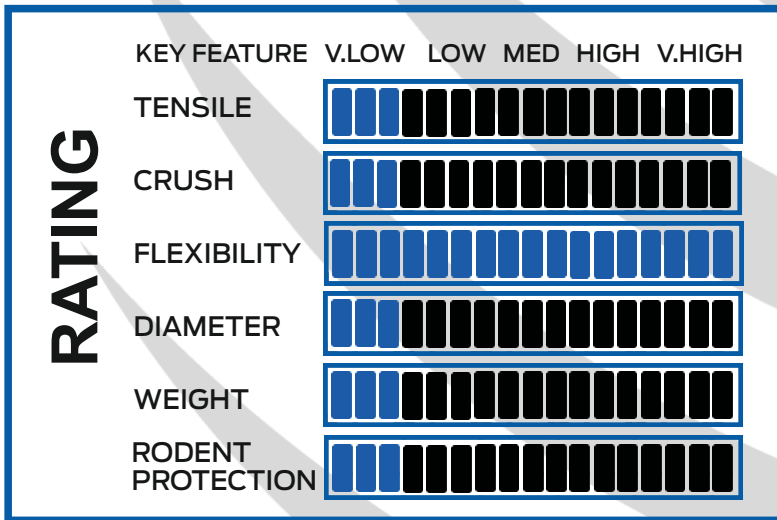


- ### CUSTOMIZED OPTIONS
- Single mode and Multimode Fibres
 - Desired Sheath Colour
 - Sheath in PU/LSZH
 - Tight Buffering in Nylon - 12 / LSZH / PVC
 - Peripheral strength member as glass yarns
 - 900 micron Tight Buffer & 600 micron Tight Buffer

| PREMISES DISTRIBUTION CABLES | | | | | | | | |
|------------------------------|-------------|---------------|----------------|----------------------|-----|---------------|----------------|-------|
| TYPE | FIBRE COUNT | DIAMETER (MM) | WEIGHT (KG/KM) | TENSILE STRENGTH (N) | | CRUSH | BENDING RADIUS | |
| | | | | I | O | | I | O |
| 2F | 2 | 3.6 ± 0.3 | 14 ± 2 | 500 | 200 | 1000N / 10 CM | 10 x D | 5 x D |
| 4F | 4 | 4.2 ± 0.3 | 18 ± 2 | | | | | |
| 6F | 6 | 6.0 ± 0.3 | 30 ± 5 | | | | | |
| 8F | 8 | 6.2 ± 0.3 | 35 ± 5 | | | | | |
| 12F | 12 | 6.8 ± 0.3 | 40 ± 5 | | | | | |
| 16F | 16 | 7.3 ± 0.3 | 48 ± 5 | | | | | |
| 24F | 24 | 8.5 ± 0.3 | 65 ± 5 | | | | | |

I - INSTALLATION O - OPERATIONAL D - CABLE DIAMETER

TEMPERATURE PERFORMANCE (°C)

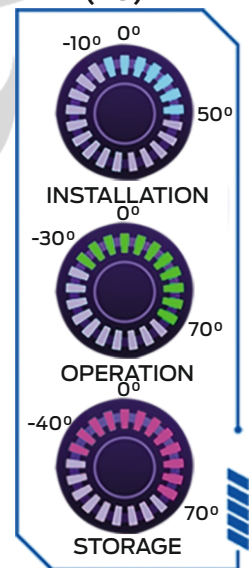

STANDARD COMPLIANCE

IEC 60794 EIA/TIA ITU-T EN187000 RUS 1755.900 CPR ROHS